

EGT2
ENGINEERING TRIPOS PART IIA

Thursday 3 May 2018 2 to 3.40

Module 3C5

DYNAMICS

*Answer not more than **three** questions.*

All questions carry the same number of marks.

*The **approximate** percentage of marks allocated to each part of a question is indicated in the right margin.*

*Write your candidate number **not** your name on the cover sheet.*

STATIONERY REQUIREMENTS

Single-sided script paper

SPECIAL REQUIREMENTS TO BE SUPPLIED FOR THIS EXAM

CUED approved calculator allowed

Attachment: 3C5 Dynamics and 3C6 Vibration data sheet (6 pages).

Engineering Data Book

10 minutes reading time is allowed for this paper at the start of the exam.

You may not start to read the questions printed on the subsequent pages of this question paper until instructed to do so.

1 A thin square plate ABCD of side $2a$ and mass $2m$ is shown in Fig. 1. At corners A and C are attached two rods each of length $2a$ and mass m as shown in the figure.

(a) For the plate ABCD alone find the principal moments of inertia using x , y and z axes as shown. In what sense can the plate be said to resemble a circular disc? [25%]

(b) Find the inertia matrix of the assembly at the centre-of-mass G using x , y and z axes. [40%]

(c) Find the principal moments of inertia of the assembly at G and show that the plate diagonal BD is one of the principal axes. [30%]

(d) In what sense is the assembly equivalent to a cylinder? [5%]

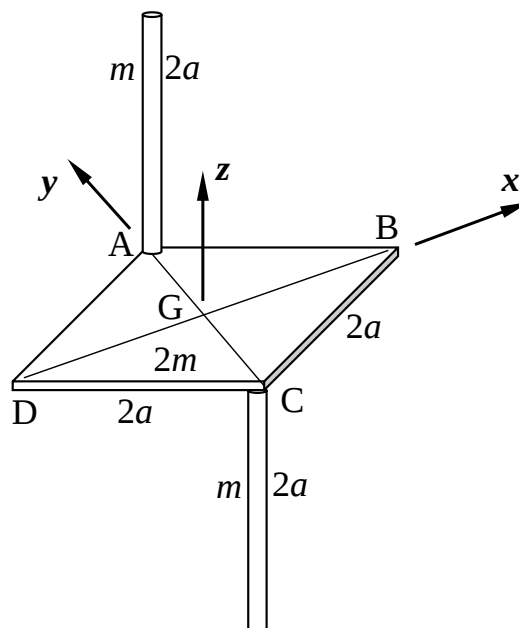


Fig. 1

2 The symmetrical rotor shown in Fig. 2 has mass m and principal moments of inertia A and C about axes passing through the fixed point O . The distance from O to the centre of mass G of the rotor is a . The rotor is spinning with a steady *fast* angular velocity ω and it is held initially with its axis inclined at a small angle α_1 from the horizontal as shown in Fig. 2(a). The acceleration due to gravity is g .

In a particular experiment the rotor is released and descends to a small angle α_2 below the horizontal as shown in Fig. 2(b). Thereafter oscillations continue, a motion similar to that observed in the 3C5 laboratory, finally dying out to give steady precession with the axis horizontal as shown in Fig. 2(c).

- (a) Find an expression for the final precession rate. [10%]
- (b) Show that the moment of momentum of the rotor about a vertical axis through O remains constant at a value of $mgaA/C\omega$ throughout the motion. [10%]
- (c) Find an expression for the small angle α_1 . [30%]
- (d) Find α_2 in terms of α_1 , assuming energy is conserved in the early motion, and find an expression for the speed of G when the rotor is at its lowest point. [50%]

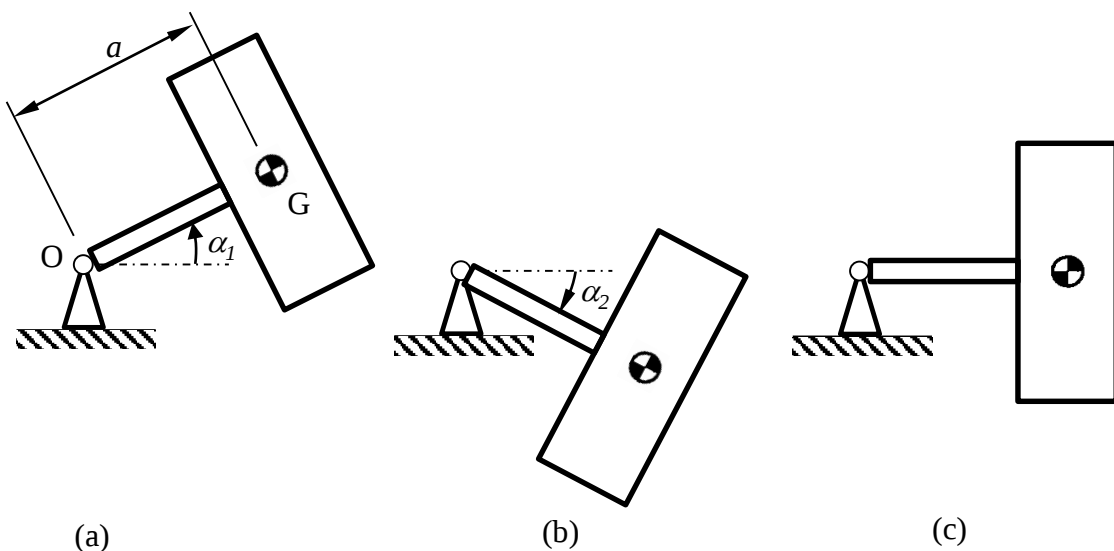


Fig. 2

3 Two celestial bodies of mass m_1 and m_2 are moving in a plane as shown in Fig. 3. The positions of the bodies are described by the polar coordinates r_1, r_2, θ_1 and θ_2 and the distance between the bodies is denoted by r . The gravitational potential energy is given by $V = -Gm_1m_2/r$ where G is the gravitational constant.

(a) By using Lagrange's equation, employing the gravitational potential energy, show that the equations of motion for r_1 and θ_1 are

$$m_1 \ddot{r}_1 - m_1 r_1 \dot{\theta}_1^2 + \left(\frac{Gm_1m_2}{r^2} \right) \left(\frac{r_1 - r_2 \cos(\theta_2 - \theta_1)}{r} \right) = 0$$

$$\frac{d}{dt} (m_1 r_1^2 \dot{\theta}_1) - \left(\frac{Gm_1m_2}{r^2} \right) \left(\frac{r_1 r_2 \sin(\theta_2 - \theta_1)}{r} \right) = 0$$

Also derive the equations of motion for r_2 and θ_2 .

[50%]

(b) Linear momentum is conserved, and this means that without loss of generality the origin of the coordinate system can be taken to be the centre of mass of the system, in which case $m_1 r_1 = m_2 r_2$ and $\theta_2 = \theta_1 + \pi$. The motion of the system can then be expressed in terms of two degrees of freedom (a, θ) where $a = r_1$ and $\theta = \theta_1$. By using your existing equations, derive the equations of motion for a and θ .

[30%]

(c) Show from the equation of motion for θ that angular momentum is conserved.

[10%]

(d) Derive an expression for the period of the motion when m_1 has a circular orbit of radius A .

[10%]

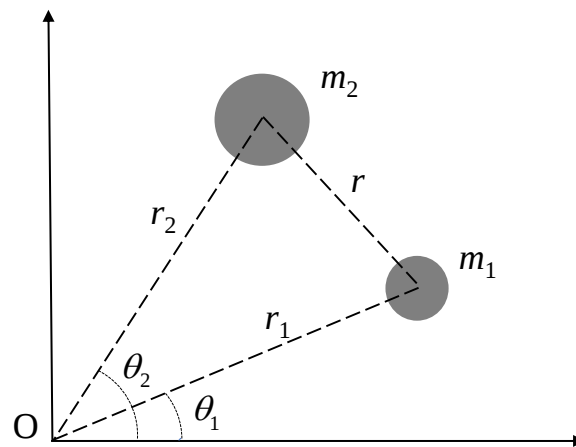


Fig. 3

4 A thin hoop of mass m and radius a is rolling in a vertical plane without slip inside a fixed vertical circular track of radius R , as shown in Fig. 4. The centre of the hoop is at G and the centre of the track is at O . Motion of the hoop under the action of gravity and a horizontal force F acting at G is described by the angle θ between OG and the vertical.

(a) Using the the datasheet formula $\mathbf{Q}^{(e)} = \dot{\mathbf{h}}_{\mathbf{P}} + \dot{\mathbf{r}}_{\mathbf{P}} \times \mathbf{p}$, where P is the contact point between the hoop and the track, find the equation of motion for the hoop. [40%]

(b) Use Lagrange's equation to find the same equation of motion. [30%]

(c) For the case $F = mg$ find the natural frequency of small vibration about the equilibrium position. [30%]

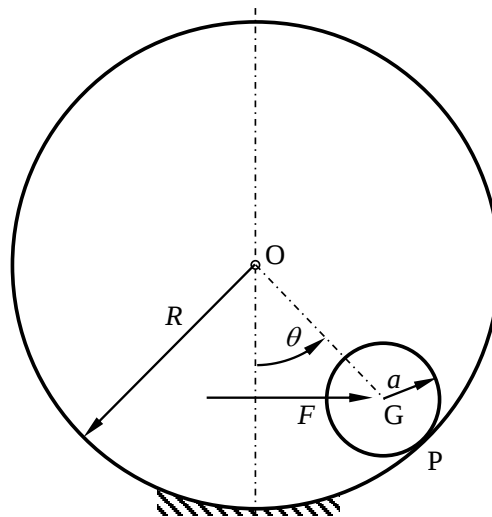


Fig. 4

END OF PAPER

Part IIA Data sheet
Module 3C5 Dynamics
Module 3C6 Vibration

DYNAMICS IN THREE DIMENSIONS

Axes fixed in direction

- (a) Linear momentum for a general collection of particles m_i :

$$\frac{d\mathbf{p}}{dt} = \mathbf{F}^{(e)}$$

where $\mathbf{p} = M \mathbf{v}_G$, M is the total mass, $\mathbf{v}_G$ is the velocity of the centre of mass and $\mathbf{F}^{(e)}$ the total external force applied to the system.

- (b) Moment of momentum about a general point P

$$\begin{aligned}\mathbf{Q}^{(e)} &= (\mathbf{r}_G - \mathbf{r}_P) \times \dot{\mathbf{p}} + \dot{\mathbf{h}}_G \\ &= \dot{\mathbf{h}}_P + \dot{\mathbf{r}}_P \times \mathbf{p}\end{aligned}$$

where $\mathbf{Q}^{(e)}$ is the total moment of external forces about P. Here, $\mathbf{h}_P$ and $\mathbf{h}_G$ are the moments of momentum about P and G respectively, so that for example

$$\begin{aligned}\mathbf{h}_P &= \sum_i (\mathbf{r}_i - \mathbf{r}_P) \times m_i \dot{\mathbf{r}}_i \\ &= \mathbf{h}_G + (\mathbf{r}_G - \mathbf{r}_P) \times \mathbf{p}\end{aligned}$$

where the summation is over all the mass particles making up the system.

- (c) For a rigid body rotating with angular velocity $\boldsymbol{\omega}$ about a fixed point P at the origin of coordinates

$$\mathbf{h}_P = \int \mathbf{r} \times (\boldsymbol{\omega} \times \mathbf{r}) dm = \mathbf{I} \boldsymbol{\omega}$$

where the integral is taken over the volume of the body, and where

$$\mathbf{I} = \begin{bmatrix} A & -F & -E \\ -F & B & -D \\ -E & -D & C \end{bmatrix}, \quad \boldsymbol{\omega} = \begin{bmatrix} \omega_x \\ \omega_y \\ \omega_z \end{bmatrix}, \quad \mathbf{r} = \begin{bmatrix} x \\ y \\ z \end{bmatrix},$$

$$\begin{aligned}\text{and} \quad A &= \int (y^2 + z^2) dm & B &= \int (z^2 + x^2) dm & C &= \int (x^2 + y^2) dm \\ D &= \int yz \, dm & E &= \int zx \, dm & F &= \int xy \, dm\end{aligned}$$

where all integrals are taken over the volume of the body.

Axes rotating with angular velocity $\boldsymbol{\Omega}$

Time derivatives of vectors must be replaced by the “rotating frame” form, so that for example

$$\dot{\mathbf{p}} + \boldsymbol{\Omega} \times \mathbf{p} = \mathbf{F}^{(e)}$$

where the time derivative is evaluated in the moving reference frame.

When the rate of change of the position vector $\mathbf{r}$ is needed, as in 1(b) above, it is usually easiest to calculate velocity components directly in the required directions of the axes. Application of the general formula needs an extra term unless the origin of the frame is fixed.

Euler's dynamic equations (governing the angular motion of a rigid body)

(a) Body-fixed reference frame:

$$A \dot{\omega}_1 - (B - C) \omega_2 \omega_3 = Q_1$$

$$B \dot{\omega}_2 - (C - A) \omega_3 \omega_1 = Q_2$$

$$C \dot{\omega}_3 - (A - B) \omega_1 \omega_2 = Q_3$$

where A, B and C are the principal moments of inertia about P which is either at a fixed point or at the centre of mass. The angular velocity of the body is $\boldsymbol{\omega} = [\omega_1, \omega_2, \omega_3]$ and the moment about P of external forces is $\boldsymbol{Q} = [Q_1, Q_2, Q_3]$ using axes aligned with the principal axes of inertia of the body at P.

(b) Non-body-fixed reference frame for axisymmetric bodies (the "Gyroscope equations"):

$$A \dot{\Omega}_1 - (A \Omega_3 - C \omega_3) \Omega_2 = Q_1$$

$$A \dot{\Omega}_2 + (A \Omega_3 - C \omega_3) \Omega_1 = Q_2$$

$$C \dot{\omega}_3 = Q_3$$

where A, A and C are the principal moments of inertia about P which is either at a fixed point or at the centre of mass. The angular velocity of the body is $\boldsymbol{\omega} = [\omega_1, \omega_2, \omega_3]$ and the moment about P of external forces is $\boldsymbol{Q} = [Q_1, Q_2, Q_3]$ using axes such that ω_3 and Q_3 are aligned with the symmetry axis of the body. The reference frame (not fixed in the body) rotates with angular velocity $\boldsymbol{\Omega} = [\Omega_1, \Omega_2, \Omega_3]$ with $\Omega_1 = \omega_1$ and $\Omega_2 = \omega_2$.

Lagrange's equations

For a holonomic system with generalised coordinates q_i

$$\frac{d}{dt} \left[\frac{\partial T}{\partial \dot{q}_i} \right] - \frac{\partial T}{\partial q_i} + \frac{\partial V}{\partial q_i} = Q_i$$

where T is the total kinetic energy, V is the total potential energy, and Q_i are the non-conservative generalised forces.

VIBRATION MODES AND RESPONSE

Discrete systems

1. The forced vibration of an N -degree-of-freedom system with mass matrix M and stiffness matrix K (both symmetric and positive definite) is

$$M \ddot{\underline{y}} + K \underline{y} = \underline{f}$$

where $\underline{y}$ is the vector of generalised displacements and $\underline{f}$ is the vector of generalised forces.

2. Kinetic energy

$$T = \frac{1}{2} \dot{\underline{y}}^t M \dot{\underline{y}}$$

Potential energy

$$V = \frac{1}{2} \underline{y}^t K \underline{y}$$

3. The natural frequencies ω_n and corresponding mode shape vectors $\underline{u}^{(n)}$ satisfy

$$K \underline{u}^{(n)} = \omega_n^2 M \underline{u}^{(n)}.$$

4. Orthogonality and normalisation

$$\begin{aligned} \underline{u}^{(j)t} M \underline{u}^{(k)} &= \begin{cases} 0, & j \neq k \\ 1, & j = k \end{cases} \\ \underline{u}^{(j)t} K \underline{u}^{(k)} &= \begin{cases} 0, & j \neq k \\ \omega_n^2, & j = k \end{cases} \end{aligned}$$

5. General response

The general response of the system can be written as a sum of modal responses

$$\underline{y}(t) = \sum_{j=1}^N q_j(t) \underline{u}^{(j)} = U \underline{q}(t)$$

where U is a matrix whose N columns are the normalised eigenvectors $\underline{u}^{(j)}$ and q_j can be thought of as the “quantity” of the j th mode.

Continuous systems

The forced vibration of a continuous system is determined by solving a partial differential equation: see p. 6 for examples.

$$T = \frac{1}{2} \int \dot{u}^2 dm$$

where the integral is with respect to mass (similar to moments and products of inertia).

See p. 4 for examples.

The natural frequencies ω_n and mode shapes $u_n(x)$ are found by solving the appropriate differential equation (see p. 4) and boundary conditions, assuming harmonic time dependence.

$$\int u_j(x) u_k(x) dm = \begin{cases} 0, & j \neq k \\ 1, & j = k \end{cases}$$

The general response of the system can be written as a sum of modal responses

$$w(x,t) = \sum_j q_j(t) u_j(x)$$

where $w(x,t)$ is the displacement and q_j can be thought of as the “quantity” of the j th mode.

6. Modal coordinates q satisfy

$$\ddot{\underline{q}} + \left[\text{diag}(\omega_j^2) \right] \underline{q} = \underline{Q}$$

where $\underline{y} = U\underline{q}$ and the modal force vector

$$\underline{Q} = U^T \underline{f}.$$

7. Frequency response function

For input generalised force f_j at frequency ω and measured generalised displacement y_k the transfer function is

$$H(j, k, \omega) = \frac{y_k}{f_j} = \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n^2 - \omega^2}$$

(with no damping), or

$$H(j, k, \omega) = \frac{y_k}{f_j} \approx \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n^2 + 2i\omega\omega_n\zeta_n - \omega^2}$$

(with small damping) where the damping factor ζ_n is as in the Mechanics Data Book for one-degree-of-freedom systems.

8. Pattern of antiresonances

For a system with well-separated resonances (low modal overlap), if the factor $u_j^{(n)} u_k^{(n)}$ has the same sign for two adjacent resonances then the transfer function will have an antiresonance between the two peaks. If it has opposite sign, there will be no antiresonance.

9. Impulse response

For a unit impulsive generalised force $f_j = \delta(t)$ the measured response y_k is given by

$$g(j, k, t) = y_k(t) = \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n} \sin \omega_n t$$

for $t \geq 0$ (with no damping), or

$$g(j, k, t) \approx \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n} \sin \omega_n t e^{-\omega_n \zeta_n t}$$

for $t \geq 0$ (with small damping).

Each modal amplitude $q_j(t)$ satisfies

$$\ddot{q}_j + \omega_j^2 q_j = Q_j$$

where $Q_j = \int f(x, t) u_j(x) dm$ and $f(x, t)$ is the external applied force distribution.

For force F at frequency ω applied at point x , and displacement w measured at point y , the transfer function is

$$H(x, y, \omega) = \frac{w}{F} = \sum_n \frac{u_n(x) u_n(y)}{\omega_n^2 - \omega^2}$$

(with no damping), or

$$H(x, y, \omega) = \frac{w}{F} \approx \sum_n \frac{u_n(x) u_n(y)}{\omega_n^2 + 2i\omega\omega_n\zeta_n - \omega^2}$$

(with small damping) where the damping factor ζ_n is as in the Mechanics Data Book for one-degree-of-freedom systems.

For a system with low modal overlap, if the factor $u_n(x) u_n(y)$ has the same sign for two adjacent resonances then the transfer function will have an antiresonance between the two peaks. If it has opposite sign, there will be no antiresonance.

For a unit impulse applied at $t = 0$ at point x , the response at point y is

$$g(x, y, t) = \sum_n \frac{u_n(x) u_n(y)}{\omega_n} \sin \omega_n t$$

for $t \geq 0$ (with no damping), or

$$g(x, y, t) \approx \sum_n \frac{u_n(x) u_n(y)}{\omega_n} \sin \omega_n t e^{-\omega_n \zeta_n t}$$

for $t \geq 0$ (with small damping).

10. Step response

For a unit step generalised force

$f_j = \begin{cases} 0 & t < 0 \\ 1 & t \geq 0 \end{cases}$ the measured response y_k is given by

$$h(j, k, t) = y_k(t) = \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n^2} [1 - \cos \omega_n t]$$

for $t \geq 0$ (with no damping), or

$$h(j, k, t) \approx \sum_{n=1}^N \frac{u_j^{(n)} u_k^{(n)}}{\omega_n^2} [1 - \cos \omega_n t e^{-\omega_n \xi_n t}]$$

for $t \geq 0$ (with small damping).

For a unit step force applied at $t = 0$ at point x , the response at point y is

$$h(x, y, t) = \sum_n \frac{u_n(x) u_n(y)}{\omega_n^2} [1 - \cos \omega_n t]$$

for $t \geq 0$ (with no damping), or

$$h(t) \approx \sum_n \frac{u_n(x) u_n(y)}{\omega_n^2} [1 - \cos \omega_n t e^{-\omega_n \xi_n t}]$$

for $t \geq 0$ (with small damping).

Rayleigh's principle for small vibrations

The "Rayleigh quotient" for a discrete system is $\frac{V}{\tilde{T}} = \frac{\underline{y}^t K \underline{y}}{\underline{y}^t M \underline{y}}$ where $\underline{y}$ is the vector of generalised coordinates, M is the mass matrix and K is the stiffness matrix. The equivalent quantity for a continuous system is defined using the energy expressions on p. 6.

If this quantity is evaluated with any vector $\underline{y}$, the result will be

- (1) $\geq$ the smallest squared frequency;
- (2) $\leq$ the largest squared frequency;
- (3) a good approximation to ω_k^2 if $\underline{y}$ is an approximation to $\underline{u}^{(k)}$.

(Formally, $\frac{V}{\tilde{T}}$ is *stationary* near each mode.)

GOVERNING EQUATIONS FOR CONTINUOUS SYSTEMS

Transverse vibration of a stretched string

Tension P , mass per unit length m , transverse displacement $w(x,t)$, applied lateral force $f(x,t)$ per unit length.

Equation of motion

$$m \frac{\partial^2 w}{\partial t^2} - P \frac{\partial^2 w}{\partial x^2} = f(x,t)$$

Potential energy

$$V = \frac{1}{2} P \int \left(\frac{\partial w}{\partial x} \right)^2 dx$$

Kinetic energy

$$T = \frac{1}{2} m \int \left(\frac{\partial w}{\partial t} \right)^2 dx$$

Torsional vibration of a circular shaft

Shear modulus G , density ρ , external radius a , internal radius b if shaft is hollow, angular displacement $\theta(x,t)$, applied torque $f(x,t)$ per unit length.

Polar moment of area is $J = (\pi / 2)(a^4 - b^4)$.

Equation of motion

$$\rho J \frac{\partial^2 \theta}{\partial t^2} - GJ \frac{\partial^2 \theta}{\partial x^2} = f(x,t)$$

Potential energy

$$V = \frac{1}{2} GJ \int \left(\frac{\partial \theta}{\partial x} \right)^2 dx$$

Kinetic energy

$$T = \frac{1}{2} \rho J \int \left(\frac{\partial \theta}{\partial t} \right)^2 dx$$

Axial vibration of a rod or column

Young's modulus E , density ρ , cross-sectional area A , axial displacement $w(x,t)$, applied axial force $f(x,t)$ per unit length.

Equation of motion

$$\rho A \frac{\partial^2 w}{\partial t^2} - EA \frac{\partial^2 w}{\partial x^2} = f(x,t)$$

Potential energy

$$V = \frac{1}{2} EA \int \left(\frac{\partial w}{\partial x} \right)^2 dx$$

Kinetic energy

$$T = \frac{1}{2} \rho A \int \left(\frac{\partial w}{\partial t} \right)^2 dx$$

Bending vibration of an Euler beam

Young's modulus E , density ρ , cross-sectional area A , second moment of area of cross-section I , transverse displacement $w(x,t)$, applied transverse force $f(x,t)$ per unit length.

Equation of motion

$$\rho A \frac{\partial^2 w}{\partial t^2} + EI \frac{\partial^4 w}{\partial x^4} = f(x,t)$$

Potential energy

$$V = \frac{1}{2} EI \int \left(\frac{\partial^2 w}{\partial x^2} \right)^2 dx$$

Kinetic energy

$$T = \frac{1}{2} \rho A \int \left(\frac{\partial w}{\partial t} \right)^2 dx$$

Note that values of I can be found in the Mechanics Data Book.